

● TV・写真スタジオ用／舞台照明用 ●

JCS

特長

- ・面光源としてフィラメント設計されたハロゲン電球です。
- ・高電力、高色温度により幅広い照明演出を提供します。

用途

- ・TV、写真スタジオ／舞台照明用／光学機器用




JCS 標準タイプ

品番	初特性					外観寸法			フィラメント形式	口金	適合ソケット	Fig.	備考
	定格電圧(V)	消費電力(W)	全光束(lm)	色温度(K)	定格寿命(h)	光中心距離 L2(mm)	全長 L1 Max.(mm)	管径 D Max.(mm)					
JCS100V500WB1	100	500	11,500	3,050	500	70	118	23	C-13D	GY9.5	G9.5/L300	1	
JCS100V500WCGX	100	500	12,000	3,150	200	55	110	23	C-13D	GX9.5		4	
JCS100V650WCC	100	650	17,000	3,200	100	36.5	72	19	C-13D	GY9.5	GY9.5	1	
JCS100V750WC1	100	750	21,000	3,200	200	62	104	21	C-13D	G9.5		6	ガラス用
JCS100V1000WBGX	100	1,000	21,000	3,000	500	70	120	23	C-13D	GX9.5		4	
JCS100V1000WC1GX	100	1,000	25,000	3,200	200	55	110	23	C-13D	GX9.5		4	
JCS100V1000WC	100	1,000	26,000	3,200	150	46.5	89	22.5	C-13D	GY9.5	GY9.5	1	
JCS100V1000WCGX	100	1,000	26,000	3,200	200	70	120	23	C-13D	GX9.5		4	


JCS 海外向けタイプ

品番	初特性					外観寸法			フィラメント形式	口金	適合ソケット	Fig.	備考
	定格電圧(V)	消費電力(W)	全光束(lm)	色温度(K)	定格寿命(h)	光中心距離 L2(mm)	全長 L1 Max.(mm)	管径 D Max.(mm)					
JCS115V600WCM	115	600	15,600	3,200	300	60.3	104	19	C-13D	G9.5		5	GLC
JCS115V600WXM	115	600	12,200	3,050	1500	60.3	104	90	C-13D	G9.5		5	
JCS120V300WC	120	300	6,900	3,200	150	46.5	127	19	C-13	GY9.5	GY9.5	1	FKW
JCS120V500WBP28	120	500	11,000	3,050	500	55.6	155.5	19	C-13D	P28S	—	2	BTL
JCS120V500WB2P28	120	500	11,000	3,050	500	88.9	90	19	C-13D	P28S		2	DNS/FMC
JCS120V500WC1	120	500	13,000	3,200	150	46.5	127	25	C-13	GY9.5	GY9.5	1	
JCS120V500WCP28	120	500	13,000	3,200	100	55.5	76.2	19	C-13D	P28S		2	BTM
JCS120V500WC/M	120	500	—	3,250	50	36.5	88.9	19.5	C-13D	GY9.5	GY9.5	1	EHA
JCS120V625WC/M	120	625	—	3,200	75	44.5	90	19	C-13D	GY9.5	GY9.5	1	BVE
JCS120V650WC	120	650	16,500	3,200	150	46.5	127	25	C-13	GY9.5	GY9.5	1	
JCS120V750WBP28	120	750	17,000	3,050	500	55.5	155.5	23	C-13D	P28S	—	2	BTN
JCS120V750WB2P28	120	750	17,000	3,050	500	88.9	114	23	C-13D	P28S		2	DNS/FMC
JCS120V750WC1	120	750	21,000	3,200	200	60.3	127	22.5	C-13D	G9.5		6	BWM
JCS120V750WCP28	120	750	20,000	3,200	200	55.5	88.9	23	C-13D	P28S		2	BTP
JCS120V900WS/M	120	900	—	3,250	75	44.5	114.3	23	C-13D	GY9.5	GY9.5	1	BVA
JCS120V1000WC1	120	1,000	28,500	3,200	250	60.3	89	23	C-13D	G9.5		5	
JCS120V1000WC2	120	1,000	26,000	3,200	150	44.5	127	23	C-13D	GY9.5	GY9.5	1	
JCS120V1000WCP28	120	1,000	27,500	3,200	200	55.5	155.5	23	C-13D	P28S	—	2	BTR
JCS120V1000WC2P28	120	1,000	27,500	3,200	200	88.9	177.8	23	C-13D	P28S		2	DNV/FME
JCS120V1000WBP40	120	1,000	23,000	3,050	500	100	177.8	23	C-13D	P40S	—	3	BVT
JCS120V1000WCP40	120	1,000	27,500	3,200	200	100	203.2	23	C-13D	P40S		3	
JCS120V2000WCP40	120	2,000	57,500	3,200	200	100	110	36	C-13	P40S		3	
JCS220V650WC1GX	220	650	16,500	3,200	100	55	89	23	C-13D	GX9.5		5	
JCS220V1000WC	220	1,000	28,000	3,200	75	46.5	110	23	C-13D	GY9.5	GY9.5	1	
JCS220V1000WCGX	220	1,000	26,000	3,200	200	55	110	36	C-13	GX9.5		7	
JCS220V1000WCGXB	220	1,000	25,000	3,200	200	55	90	23	C-13D	GX9.5		4	
JCS220/230V500WB1GY(B)	225	500	11,000	3,000	300	46.5	130	23	C-13D	GY9.5	GY9.5	1	
JCS220/230V500WBP28(B)	225	500	9,500	2,950	750	55.6	90	23	C-13D	P28S		2	
JCS220/230V650WB1GY(B)	225	650	14,500	3,050	400	46.5	23	C-13D	GY9.5	GY9.5		1	

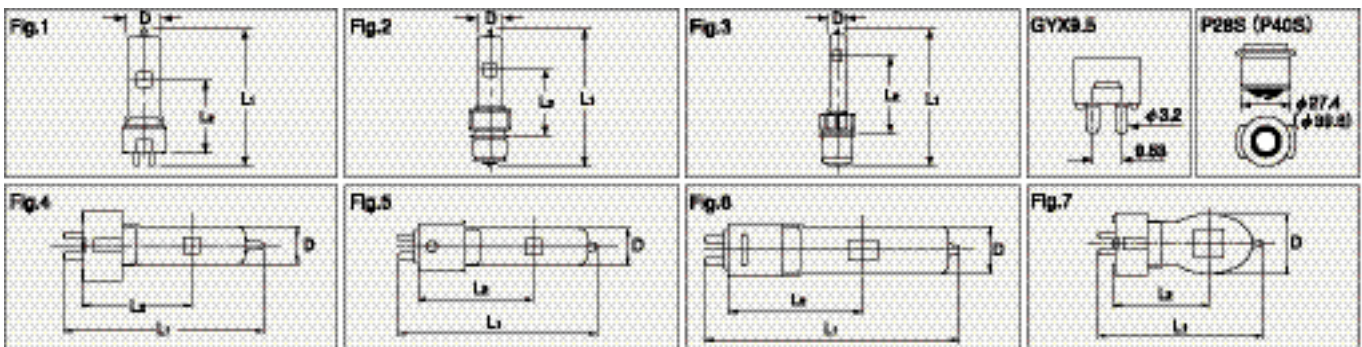

## JCS 海外向けタイプ

品番	初特性					外観寸法			フラット形式	口金	適合ソケット	Fig.	備考
	定格電圧(V)	消費電力(W)	全光束(lm)	色温度(K)	定格寿命(h)	光中心距離 L2(mm)	全長 L1 Max.(mm)	管径 D Max.(mm)					
JCS225V500WC	225	500	12,500	3,200	150	46.5	90	23	C-13	GY9.5	GY9.5	1	
JCS225V1200WBGXB	225	1,200	27,600	3,000	400	55	110	23	C-13D	GX9.5		4	
JCS230V300WC	230	300	6,600	3,050	150	46.5	90	23	C-13	GY9.5	GY9.5	1	
JCS230V500WB1GYB	230	500	11,000	3,000	300	46.5	90	23	C-13D	GY9.5	GY9.5	1	
JCS230V500WC	230	500	12,500	3,200	150	46.5	90	23	C-13	GY9.5	GY9.5	1	
JCS230V650WBGXB	230	650	12,600	3,000	750	55	110	23	C-13D	GX9.5		4	
JCS230V650WB1GYB	230	650	14,500	3,050	400	46.5	90	23	C-13D	GY9.5	GY9.5	1	
JCS230V650WC	230	650	16,500	3,200	150	46.5	90	23	C-13	GY9.5	GY9.5	1	
JCS230V650WC1GXB	230	650	16,500	3,200	100	55	110	23	C-13D	GX9.5		4	
JCS230V1000WBGXB	230	1,000	21,000	3,050	750	55	110	23	C-13D	GX9.5		4	
JCS230V1000WCGXB	230	1,000	25,000	3,200	200	55	110	23	C-13D	GX9.5		4	
JCS220/230V650WBGXB	225	650	12,600	3,000	750	55	110	23	C-13D	GX9.5		4	
JCS220/230V650WBP28B	225	650	12,600	3,000	750	55.6	125	23	C-13D	P28S		2	
JCS220/230V650WC	225	650	16,500	3,200	100	46.5	90	23	C-13	GY9.5	GY9.5	1	
JCS220/230V1000WB1P28B	225	1,000	21,000	3,050	600	89	160	23	C-13D	P28S		2	
JCS220/230V1000WBGXB	225	1,000	21,000	3,050	750	55	100	23	C-13D	GX9.5		4	
JCS220/230V1000WBP28	225	1,000	21,000	3,050	750	55.6	125	23	C-13D	P28S		2	
JCS240V500WC	240	500	12,500	3,200	75	36.5	75	23	C-13	GY9.5	GY9.5	1	
JCS240V600WCM	240	600	14,000	3,200	300	60.5	101	19	C-13D	G9.5		5	
JCS240V1000WC	240	1,000	28,000	3,200	75	46.5	89	23	C-13D	GY9.5	GY9.5	3	
JCS240/250V650WB1GYB	245	650	14,500	3,050	400	46.5	90	23	C-13D	GY9.5	GY9.5	1	
JCS240/250V650WBGXB	245	650	12,600	3,000	750	55	110	23	C-13D	GX9.5		4	
JCS240/250V650WBP28B	245	650	12,600	3,000	750	55.6	125	23	C-13D	P28S		2	
JCS240/250V650WC	245	650	16,500	3,200	150	46.5	90	23	C-13	GY9.5	GY9.5	1	
JCS240/250V300WCF	245	300	6,500	3,050	150	46.5	80	15	C-10	GY9.5	GY9.5	1	
JCS240/250V500WB1GYB	245	500	11,000	3,000	300	46.5	90	23	C-13D	GY9.5	GY9.5	1	
JCS240/250V500WBP28B	245	500	9,500	2,950	750	55.6	130	23	C-13D	P28S		3	
JCS240/250V500WC	245	500	12,500	3,200	150	46.5	90	23	C-13	GY9.5	GY9.5	1	
JCS240/250V1000WBP28B	245	1,000	21,000	3,050	750	55.6	125	23	C-13D	P28S		3	
JCS240/250V1000WBGXB	245	1,000	21,000	3,050	750	55	110	23	C-13D	GX9.5		4	
JCS240/250V1000WB1P28B	245	1,000	21,000	3,050	600	89	160	23	C-13D	P28S		2	

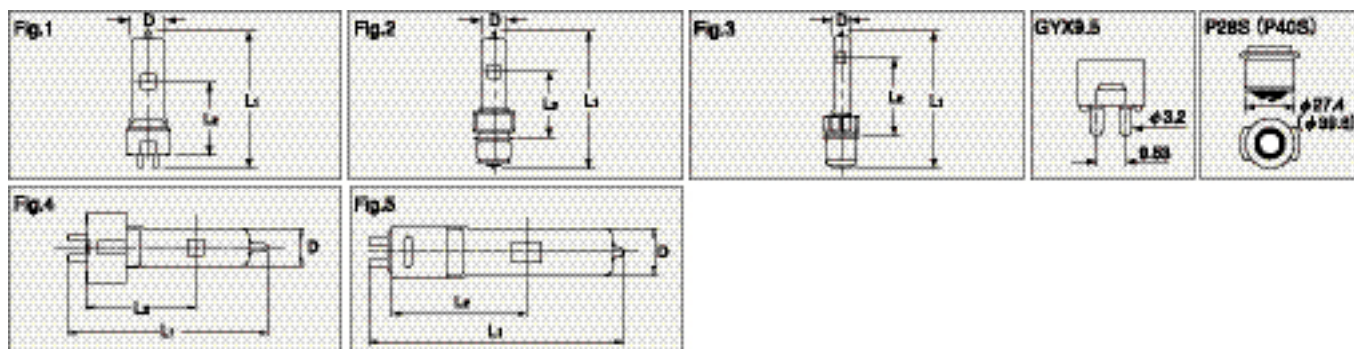

Location  
マギースタジオ

