


■ ブレーカー用圧着端子(CB型)

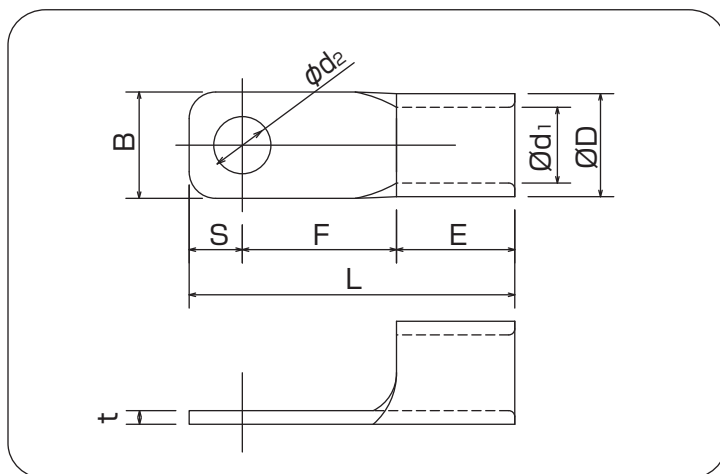

RoHS (22~60sq) **RoHS** (80~325sq)

単位:mm

| 呼び | ϕd_2 | B | L | F | E | S | ϕD | ϕd_1 | t | 電線抱合容量 撚線mm ² (参考) | 適合工具 | 一箱入数 | | | | | | |
|-----|-----------------|------|------|------|------|------|----------|------------|------|----------------------------------|--------|------------------|-----|--------------------|-----|-----------|-----|-----------|
| 22 | CB22-5 | 5.3 | 12 | 30.9 | 13.4 | 11.5 | 6 | 11.5 | 7.7 | 1.8 | 16.78 | 9H-60 REC-60G | 100 | | | | | |
| | CB22-6 | 6.4 | | | | | | | | | | | | 26.66 | | | | |
| | CB22-8 | 8.4 | | | | | | | | | | | | | | | | |
| 38 | CB38-5 | 5.3 | 13.5 | 36 | 16 | 13 | 7 | 13.3 | 9.4 | 1.8 | 26.66 | | | 9H-150 REC-150F | 100 | | | |
| | CB38-6 | 6.4 | | | | | | | | | | | | | | 42.42 | | |
| | CB38-S6 | 6.4 | 12.5 | 34.5 | 5.5 | | | | | | | | | | | | | |
| 60 | CB60-6 | 6.4 | 16 | 49 | 23.2 | 17.8 | 8 | 15.5 | 11.4 | 1.9 | 42.42 | | | | | 12号A | 100 | |
| | CB60-8 | 8.4 | | | | | | | | | | | | | | | | 60.57 |
| | CB60-10 | 10.5 | | | | | | | | | | | | | | | | |
| 80 | CB80-8 | 8.4 | 22 | 51 | 20 | 20 | 11 | 19.5 | 14.5 | 2.3 | 76.28 | | | | | | | REC-325CH |
| | CB80-10 | 10.5 | | | | | | | | | | 96.30 | | | | | | |
| | CB80-12 | 13 | | | | | | | | | | | | | | | | |
| 100 | CB100-8 | 8.4 | 53 | 22 | 22 | 20 | 11 | 22.3 | 16.4 | 2.6 | 96.30 | REC-325CH | 50 | | | | | |
| | CB100-10 | 10.5 | | | | | | | | | | | | 117.20 | | | | |
| | CB100-12 | 13 | | | | | | | | | | | | | | | | |
| 150 | CB150-8 | 8.4 | 60.5 | 23 | 26.5 | 20 | 11 | 26.5 | 19.5 | 3.2 | 117.20 | | | REC-325CH | 30 | | | |
| | CB150-10 | 10.5 | | | | | | | | | | | | | | 152.05 | | |
| | CB150-12 | 13 | | | | | | | | | | | | | | | | |
| 200 | CB200-8 | 8.4 | 36 | 72 | 22 | 32 | 18 | 32.7 | 24 | 4.0 | 152.05 | | | | | REC-325CH | 20 | |
| | CB200-10 | 10.5 | | | | | | | | | | | | | | | | 242.27 |
| | CB200-12 | 13 | | | | | | | | | | | | | | | | |
| 325 | CB325-S10 | 10.5 | 38.5 | 85.5 | 32 | 36.5 | 17 | 37.6 | 28 | 4.5 | 242.27 | | | | | | | REC-325CH |
| | CB325-10 | | 44 | | | | | | | | | | | | | | | |
| | CB325-S12 | 13 | 38.5 | | | | | | | | | | | | | | | |
| | CB325-12 | | 44 | | | | | | | | | | | | | | | |

(注意) ・各部の寸法は予告なく変更することがあります。
 ・太字は、日本電機工業会規格JEM1399(低圧開閉器用裸圧着端子)準拠品です。