


ニツ穴端子 (RD形)

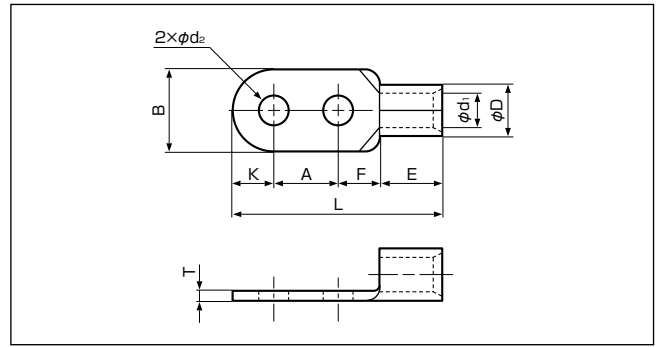

UL LISTED E42024

SP LR20812


JIS JICA JQ0608019
JIS C 2805

形番	規格	寸法(mm)										適用電線範囲			適用圧着工具		1箱 入数 (個)				
		φd2	B	L	F	A	K	E	φD	φd1	T	単線(mm)	撚線(mm ²)	AWG(#)	空気圧式	油圧式					
RD38-0(10)		—			—	—	—														
RD38-10		11.0	22.0	84.0	28.0	32.0		14.0	13.3	9.4	1.8	5.81 }	26.66 }	2	YA-5	YPT-60N,YPT-150-1 BCT-860N,BCT-8150 (本体) YF-1,E-4 (ヘッド) YET-60-1 YET-150-1	50				
RD38-12		14.0			20.0	40.0	10.0					7.34 }	42.42 }								
RD60-10	UL LISTED SP JIS	11.0		78.0	17.0	32.0															
RD60-12	UL LISTED SP JIS	14.0	22.0	89.0	20.0		11.0	18.0	15.5	11.4	2.0	7.34 }	42.42 }	1/0	YA-5	YPT-60N,YPT-150-1 BCT-860N,BCT-8150 (本体) YF-1,E-4 (ヘッド) YET-60-1 YET-150-1,YET-300-1 YET-300N	50				
RD60-14	UL LISTED SP JIS	16.0	32.0	95.0	21.0		16.0					8.26 }	60.57 }								
RD70-10	UL LISTED SP	11.0		80.0	17.0	32.0						8.26 }	60.57 }								
RD70-12	UL LISTED SP	14.0	24.0	91.0	20.0		12.0	19.0	17.5	13.3	2.0			2/0							
RD70-14	UL LISTED SP	16.0	32.0	96.0	21.0		16.0					9.27 }	76.28 }								
RD80-0(12)		—		94.2	—	—	—														
RD80-10	UL LISTED SP	11.0	27.0	82.5	17.0	32.0						9.27 }	76.28 }								
RD80-12	UL LISTED SP	14.0		94.2	20.7		13.5	20.0	19.5	14.5	2.3			3/0							
RD80-14	UL LISTED SP	16.0	32.0	97.0	21.0		16.0					10.41 }	96.3 }								
RD100-0(12)		—		95.5	—	—	—														
RD100-10	UL LISTED SP JIS	11.0	28.5	84.3	17.0	32.0						10.41 }	96.3 }								
RD100-12	UL LISTED SP JIS	14.0		95.5	20.3		14.3	21.0	22.3	16.4	2.6			4/0							
RD100-14	UL LISTED SP JIS	16.0	32.0	98.0	21.0		16.0					11.68 }	117.2 }								
RD150-0		—		—	—	—	—														
RD150-12	UL LISTED SP JIS	14.0	36.0	106.0				27.0	26.5	19.5	3.2	11.68 }	117.2 }	250/ 300MCM							20
RD150-14	UL LISTED SP JIS	16.0			21.0	40.0	18.0					13.8 }	152.05 }								
RD180-12	UL LISTED SP	14.0		108.8	21.0	40.0	19.3	28.5	28.5	21.0	3.5	13.8 ~15.6	152.05 ~192.60	350MCM							20
RD180-14	UL LISTED SP	16.0	38.5																		
RD200-0		—		—	—	—	—														
RD200-12	UL LISTED SP JIS	14.0	44.0	116.5				31.5	32.7	24.0	4.0	15.6 }	192.60 }	400MCM							10
RD200-14	UL LISTED SP JIS	16.0			23.0	40.0	22.0					17.5 }	242.27 }								
RD325-0		—		—	—	—	—														
RD325-12	UL LISTED SP JIS	14.0	50.5	123.8				35.5	37.6	28.0	4.5	17.5 }	242.27 }	600/ 650MCM							5
RD325-14	UL LISTED SP JIS	16.0			23.0	40.0	25.3					20.3 }	325 }								

注1) ニツ穴端子にはJIR(車両)用タイプもありますので参照ください。

注2) 本製品の中には多少納期を要するものもあります。

ニツ穴端子 (NTT形)

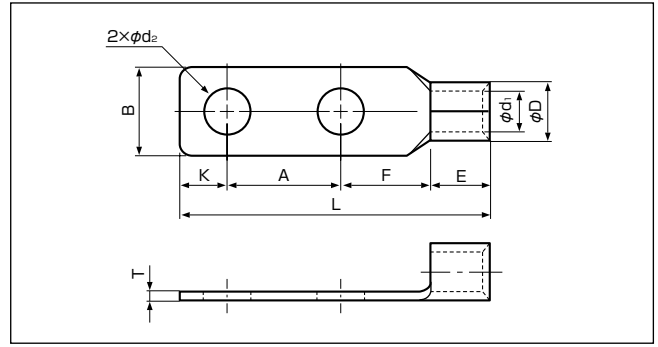

形番	寸法(mm)										適用電線範囲			適用圧着工具			1箱 入数 (個)
	φd2	B	L	F	A	K	E	φD	φd1	T	単線(mm)	撚線(mm ²)	AWG(#)	手動	空気圧式	油圧式	
5.5-D-4	4.3	10.0	34.7	10.9	12.0	5.0	6.8	5.5	3.4	1.0	1.82	2.63	12	YHT-2210	YA-1, YA-2 YAT-1A YAT-2A YAD-1A YAD-2A, YA-4 YAT-4A YAD-4A	BCT-0514	500
5.5-D-5	5.3		34.2								2.89	6.64	10				
8-D-5	5.3	15.0	38.0	11.5	12.0	6.0	8.5	7.1	4.5	1.2	2.89	6.64	8	YHT-8S	YA-4 YA-5 YAT-4A YAD-4A	YPT-60N YPT-150-1 BCT-0514 BCT-860N BCT-8150	200
8-D-6	6.4										3.65	10.52					
8-D-8	8.4	22.0	66.5	17.0	28.0	13.0	10.5	9.0	5.8	1.5	3.65	10.52	6	—	YA-4 YA-5 YAT-4A YAD-4A	(本体) YF-1, E-4 (ヘッド) YET-60-1 YET-150-1	100
14-D-5	5.3	48.0	14.5	16.0	7.0	4.62											
14-D-6	6.4	22.0	68.5	17.0	28.0	13.0	12.0	11.5	7.7	1.8	5.81	26.66	4	—	YA-5	YPT-60N YPT-150-1 BCT-860N BCT-8150	100
14-D-8	8.4																
14-D-10	10.5	22.0	69.0	16.0	28.0	13.0	14.0	13.3	9.4	1.8	5.81	26.66	2	—	YA-5	(本体) YF-1, E-4 (ヘッド) YET-60-1 YET-150-1	100
22-D-5	5.3	52.0	15.0	16.0	7.0	7.34											
22-D-6	6.4	18.0	52.0	15.0	16.0	7.0	15.0	15.5	11.4	2.0	7.34	42.42	1/0	—	YA-5	YPT-60N YPT-150-1 BCT-860N BCT-8150	50
22-D-8	8.4																
22-D-10	10.5	22.0	77.0	22.0	28.0	13.0	20.7	22.3	16.4	2.7	10.41	96.3	4/0	—	—	YPT-150-1 BCT-8150	25
38-D-5	5.3	88.7	21.0	32.0	15.0	20.0											
38-D-6	6.4	28.5	95.0	20.0	40.0	15.0	20.0	22.3	16.4	2.7	11.68	117.2	4/0	—	—	(本体) YF-1, E-4 (ヘッド) YET-150-1 YET-300-1 YET-300N	20
38-D-8	8.4																
38-D-10	10.5	22.0	77.0	22.0	28.0	13.0	11.68	117.2	26.5	19.5	3.3	15.6	192.60	—	—	(本体) YF-1, E-4 (ヘッド) YET-300-1 YET-300N	10
60-D-10	11.0	88.7	21.0	32.0	15.0	20.0											
60-D-12	14.0	22.0	89.5	16.5	40.0	18.0	17.5	242.27	32.7	24.0	4.0	17.5	242.27	—	—	(本体) YF-1, E-4 (ヘッド) YET-300-1 YET-300N	5
100-D-10	11.0	88.7	21.0	32.0	15.0	20.0											
100-D-12	14.0	28.5	95.0	20.0	40.0	15.0	17.5	242.27	32.7	24.0	4.0	17.5	242.27	—	—	(本体) YF-1, E-4 (ヘッド) YET-300-1 YET-300N	5
150-D-12	14.0	36.0	106.0	21.0	40.0	18.0											
200-D-12	14.0	43.5	115.7	25.0	40.0	18.0	17.5	242.27	32.7	24.0	4.0	17.5	242.27	—	—	(本体) YF-1, E-4 (ヘッド) YET-300-1 YET-300N	5
325-D-12	14.0	50.5	124.0	30.5	40.0	18.0											

注) 本製品の中には多少納期を要するものもあります。