


■ビニル絶縁付丸形端子(ストレート形)

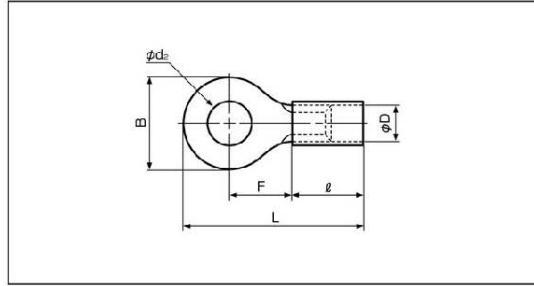

UL E4204 LR20812 JIS JQ608019 JIS C 2805

| 形番 | 規格 | 寸法(mm) | | | | | | | 標準色 | 適用電線範囲 撚線(mm ²) | 適用圧着工具 | | | 1箱 入数 (個) | |
|-----------------------|----|-----------------|------|------|------|-----|-----|-----|-----|---|----------|--|----------|-----------------|------|
| | | φd ₂ | B | L | F | ℓ | φD | 板厚 | | | 手動 | 空気圧式 | 油圧式 | | |
| V0.5-2 | UL | 2.2 | 5.2 | 16.4 | 5.8 | 8.0 | 1.9 | 0.5 | 黄 | 0.2~0.5 (0.2 (AWG#24) 0.3 (AWG#22) 0.5 | YNT-2622 | YA-1, YA-2 YAT-1A YAT-2A YAD-1A YAD-2A | BCT-0514 | 1,000 | |
| V0.5-3 | UL | 3.2 | 6.6 | 7.7 | | | | | | | | | | | |
| V0.5-3.7 | UL | 3.7 | 19.0 | 7.0 | | | | | | | | | | | |
| V0.5-4 | UL | 4.3 | 7.0 | | | | | | | | | | | | |
| V0.5-5 | UL | 5.3 | 8.0 | | | | | | | | | | | | |
| V1.25-2 | UL | 2.2 | 5.5 | 15.7 | 4.0 | 9.0 | 3.2 | 0.8 | 赤 | ※ 0.25~1.65 ※ (0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 1.25 (AWG#16) | YNT-2216 | YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A | BCT-0514 | 1,000 | |
| V1.25-3(RAA1.25-3) | UL | 3.2 | 17.4 | 5.6 | | | | | | | | | | | |
| V1.25-MS3 | UL | 8.0 | 20.0 | 7.0 | | | | | | | | | | | |
| V1.25-L3 | UL | 5.5 | 15.7 | 4.0 | | | | | | | | | | | |
| V1.25-3.7 | UL | 3.7 | 6.6 | 18.6 | 6.3 | | | | | | | | | | |
| V1.25-M3(RAA1.25-3.5) | UL | 4.3 | 8.0 | 20.0 | 7.0 | | | | | | | | | | |
| V1.25-M4 | UL | 9.0 | 24.6 | 11.1 | | | | | | | | | | | |
| V1.25-4(RAA1.25-4) | UL | 8.0 | 20.0 | 7.0 | | | | | | | | | | | |
| V1.25-5NS | UL | 5.3 | 9.0 | 24.6 | 11.1 | | | | | | | | | | |
| V1.25-5(RAA1.25-5) | UL | 8.0 | 20.0 | 7.0 | | | | | | | | | | | |
| V1.25-6 | UL | 6.4 | 11.6 | 25.9 | 11.1 | | | | | | | | | | |
| V1.25-8 | UL | 8.4 | 13.6 | 29.7 | 13.9 | | | | | | | | | | |
| V1.25-10 | UL | 10.5 | 13.6 | 29.7 | 13.9 | | | | | | | | | | |
| V2-S2 | UL | 2.2 | 6.4 | 16.5 | 4.3 | 9.0 | 3.9 | 0.8 | 青 | 1.04~2.63 (1.25 (AWG#16) 2.0 (AWG#14) | YNT-1614 | YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A | BCT-0514 | 1,000 | |
| V2-MS3 | UL | 3.2 | 5.5 | 17.4 | 5.6 | | | | | | | | | | |
| V2-S3.3 | UL | 3.2 | 6.4 | 16.5 | 4.3 | | | | | | | | | | |
| V2-3 | UL | 3.7 | 8.5 | 21.0 | 7.8 | | | | | | | | | | |
| V2-S3 | UL | 3.7 | 6.4 | 16.5 | 4.3 | | | | | | | | | | |
| V2-P3.5 | UL | 3.7 | 7.0 | 20.2 | 7.7 | | | | | | | | | | |
| V2-M3(RAA2-3.5) | UL | 6.6 | 18.6 | 6.3 | | | | | | | | | | | |
| V2-M4 | UL | 4.3 | 7.0 | 20.2 | 7.7 | | | | | | | | | | |
| V2-P4 | UL | 8.5 | 21.0 | 7.8 | | | | | | | | | | | |
| V2-4(RAA2-4) | UL | 5.3 | 9.0 | 24.5 | 11.0 | | | | | | | | | | |
| V2-M5 | UL | 9.5 | 21.0 | 7.3 | | | | | | | | | | | |
| V2-5NS | UL | 6.4 | 12.0 | 26.0 | 11.0 | | | | | | | | | | |
| V2-5(RAA2-5) | UL | 8.4 | 10.5 | 13.6 | 13.9 | | | | | | | | | | |
| V2-6(RAA2-6) | UL | 13.0 | 19.0 | 35.2 | 16.7 | | | | | | | | | | |
| V2-8(RAA2-8) | UL | 15.0 | 17.0 | 27.0 | 43.7 | | | | | | | | | | 21.2 |
| V2-10 | UL | 21.0 | | | | | | | | | | | | | |
| V2-12 | UL | | | | | | | | | | | | | | |
| V2-14 | UL | | | | | | | | | | | | | | |
| V2-16 | UL | | | | | | | | | | | | | | |
| V2-20 | UL | | | | | | | | | | | | | | |

注1) ()はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No.JIS C 2805

注2) ※印は電線の合計断面積が0.5mm²以上となる様にして使用すればより確実になります。(例: 0.3mm²を2つ折りにして圧着、0.5mm²はそのまま圧着)

注3) 本製品の中には多少納期を要するものもあります。

注4) V0.5-()におけるUL登録の適用電線はAWG#26~AWG#22です。